


Лити
чл.2 33ЛД

logitech

DESIGNED FOR BIG ROOMS AND EVEN BIGGER IDEAS.

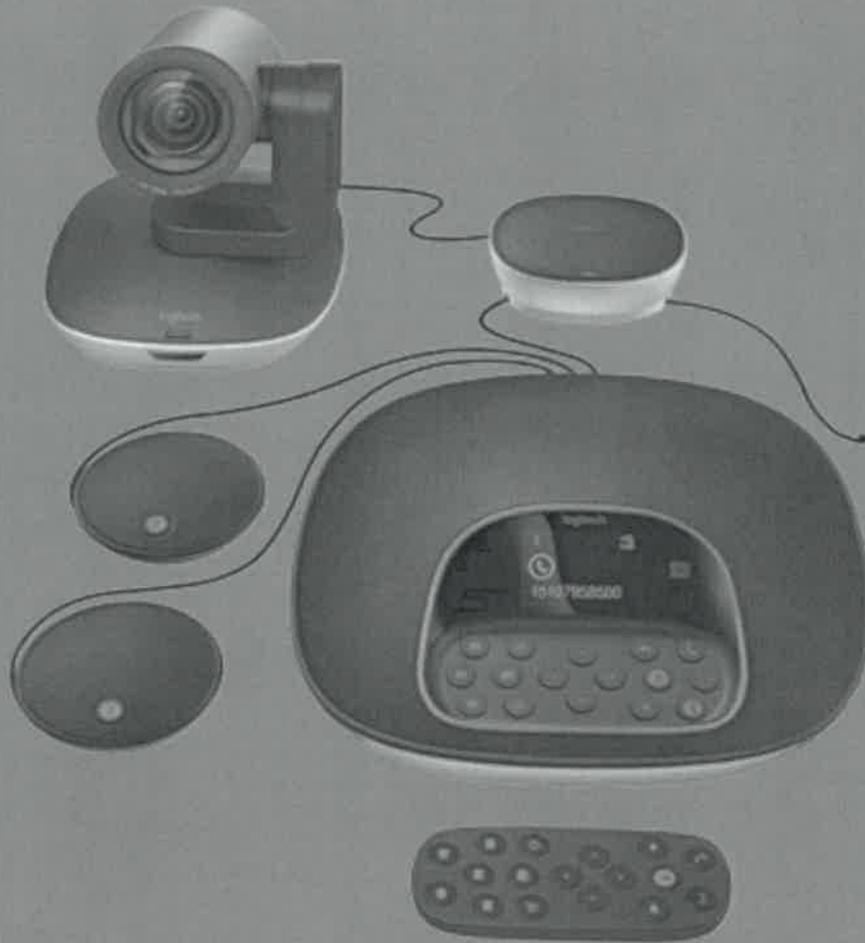

чл.2 33ЛД

Logitech GROUP

GROUP, the amazingly affordable video conferencing system for mid to large-size conference rooms, allows any meeting place to be a video collaboration space. It's as simple to use as a mobile phone and affordable as an office chair, now it's easier than ever to include anyone in the conversation.

USB plug-and-play connectivity makes GROUP a breeze to deploy and use. It even works within your own familiar computing environment with any video conferencing software application — including the ones you already use.

Razor sharp video and a beautifully designed full-duplex speakerphone deliver an outstanding collaboration experience that's so awesome everyone can be seen and heard. Simply connect a laptop and start a meeting, or use the state-of-the-art speakerphone with a Bluetooth® wireless technology enabled mobile device for great-sounding audio calls.



BlueJeans

lifesize.

zoom



broadsoft





ВАРНО С ОРИГИНАЛА

чл.2 33ЛД

КОИ чл.2 33ЛД
АН 1

Logitech GROUP

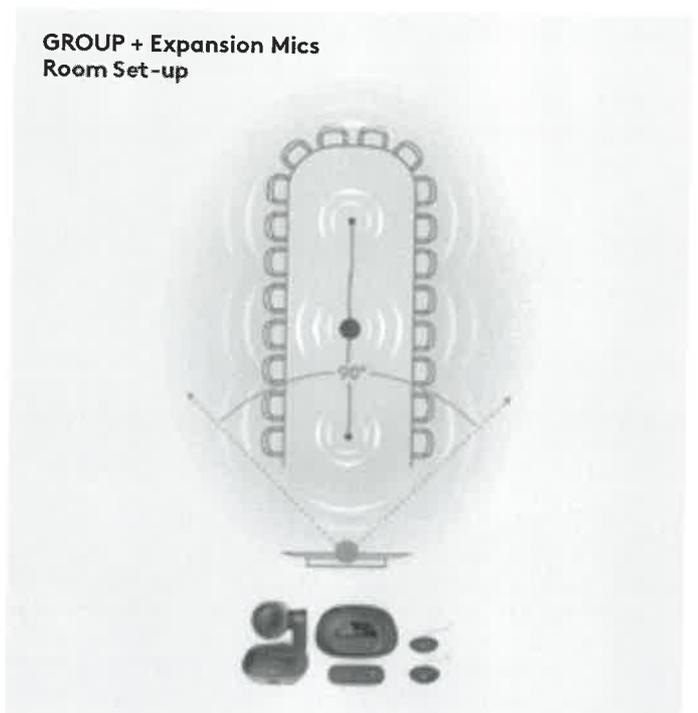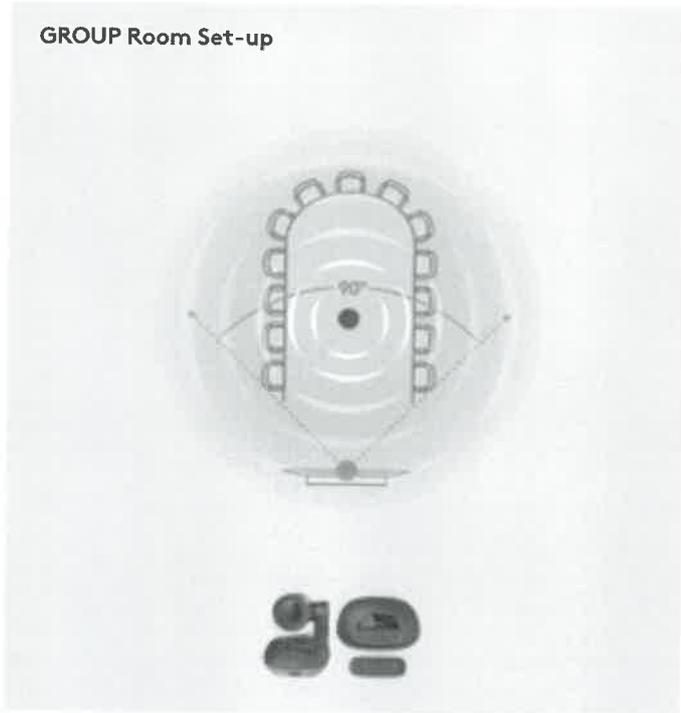

Video Conferencing Elevated.

GROUP, our video conferencing solution for groups of 14–20 people, delivers high quality HD video and crystal clear audio, allowing any meeting place to be a video collaboration space. With advanced features like acoustic echo cancellation, noise reduction technology, and intuitive controls, now it's easier than ever to include anyone in the conversation.

Video Collaboration Made Simple.

USB plug-and-play connectivity makes GROUP easy to use. Simply connect a laptop to conduct life-like meetings within your own familiar computing environment for use with any video conferencing software application — including the ones you already use. Plus, you can use the state-of-the-art speakerphone with a Bluetooth wireless technology enabled mobile device for great-sounding audio calls.

Your Meeting Space **чл.2 33ЛД**

GROUP offers the flexible conference room set-up with multiple camera mounting options. Use the camera on the table or mount it on the wall with included hardware. The bottom of the camera is designed with a standard tripod thread for added versatility. Conference participants can also clearly converse within a 6 m/20' diameter around the base, or extend the range to 8.5 m/28' with optional expansion mics.



For razor sharp close-ups of objects and whiteboard content, the GROUP camera offers 10x lossless zoom, enabling your team to see every detail with outstanding resolution and clarity.



СЪРНО С ОРИГИНАЛА

[Handwritten signature]

Logitech GROUP



HD 1080p video quality at 30 frames-per-second
Brings life-like full HD video to conference calls, enabling expressions, non-verbal cues and movements to be seen clearly.

H.264 with Scalable Video Coding (SVC) and UVC 1.5

Preserves PC processing and battery power by putting video processing within the camera adjusting dynamically to the available bitstream. The result is a smoother video stream in applications like Skype® for Business and in Windows® 8 and Windows 10.

90° field of view with mechanical 260° pan and 130° tilt

The generously wide field of view and silky smooth pan and tilt controls enhance collaboration by making it easy to see everyone in the room.

10x lossless HD zoom

Zero in on close-ups of objects and whiteboard content with outstanding detail and clarity.

Autofocus

High-precision lens automatically focuses on people and objects to deliver razor-sharp resolution wherever the lens is pointed.

Razor-sharp optics

Enhance face-to-face collaboration. Advanced Logitech lens technology delivers remarkable video quality with superb resolution, speed, fluidity, color balance, and detail.

Far-end camera control

Operate camera pan, tilt and zoom functions¹ of another Logitech® ConferenceCam or Webcam C930e in the other location.

5 camera presets

Multiple camera presets make it easy to frame and focus the lens on frequently used views — such as the conference table, whiteboard, and close-ups — and quickly return to each view at the touch of a button.

Plug-and-play camera setup

Simply connect camera to powered hub with 4.9 m/16' cable provided to get up and running in a snap.

Full-duplex speakerphone

Hear and be heard with life-like sound that's crisp, clear, and highly intelligible. Plus the cast metal base console is loaded with advanced audio features and intuitive controls.

Spacious audio

Conference participants can converse within a 6 m/20' diameter around the speakerphone and be heard so clearly by remote participants that it seems like conversations are happening in the same room.

Optional expansion mics

Expand the conversation area from 6 m/20' to 8.5 m/28' so that even those away from the speakerphone can be clearly heard. Microphones, sold in pairs, are automatically recognized and configured by simply plugging them into the GROUP speakerphone.

Beamforming technology with four omni-directional mics

Conversations sound realistic and natural by minimizing sound reflections (reverb) and distracting audio artifacts.

Acoustic echo cancelation

Advanced acoustic engineering reduces echo, making calls sound more natural.

Noise reduction technology

Ambient noises and other distracting tones are suppressed to support comfortable, natural-sounding conversation on both ends of the call.

HD audio

High bandwidth audio reproduces vocal tones with exceptional quality, enabling people on both sides of the call to enjoy a life-like communication experience.

Visual call status indicator

Onboard LEDs flash to provide visual alerts when on a call, when there's an incoming call and when an incoming call is muted.

LCD displays Caller ID and other info

View call-related info² (Caller ID, call duration, etc.) and speakerphone/camera function indicators (volume control, etc.) on LCD display screen.

Plug-and-play speakerphone setup

Simply plug the speakerphone into the powered hub with the supplied 4.9 m/16' cable to get up and running in no time.

Tight integration with top cloud communication apps

Logitech partners with the top communication developers³ to ensure the most integrated and seamless experience when using GROUP.

Compatible with Mac® and PC

Simply connect a PC or Mac® to conduct meetings within the user's own familiar computing environment.

Works with most L video conferencing

Users are free to use application of their

чл.2 33ЛД

Bluetooth wireless technology and Near Field Communication (NFC) technology³

Connect the speakerphone to a Bluetooth wireless technology enabled device for great-sounding audio calls, or pair NFC-enabled mobile devices by simply bringing them close together.

Professional-grade certifications

Leading business certifications (Certified for Skype for Business, Cisco Jabber® and WebEX® compatible⁴) and enhanced integration with Logitech Collaboration Program (LCP) members⁵ ensure an integrated experience with most business-grade video conferencing platforms.

Optional GROUP Extended Cables

The optional GROUP 10m Extended Cable can be routed through a conduit to double the distance from 5 to 10 meters (32.8') between the Logitech GROUP hub and the camera or speakerphone. For longer runs involving plenum-spaces, use the GROUP 15m Extended Cable to triple the distance from 5 to 15 meters (49.2')⁶.

Multiple camera mounting options and device setup configurations

Set up the conference room the way you want with up to a 9.8 m/32' range between camera and speaker. Use the camera on the table or mount it on the wall with included hardware. The bottom of the camera is designed with a standard tripod thread for added versatility.

Dockable remote control

Operate camera pan, tilt and zoom, volume up/down and answer/hang-up⁷ functions on the base speakerphone console or with remote control that docks in console when not in use.

PTZ app

Control local camera pan, tilt and zoom functions from PC or Mac with simple-to-use software app.

чл.2 33ЛД

ВЕРНО С ОРИГИНАЛА

чл.2 33ЛД

КОПИРАК
А Д 1

СМТ,
чл.2 33ЛД

Logitech GROUP

TECH SPECS

CAMERA

Smooth motorized pan, tilt and zoom, controlled from remote or console

260° pan, 130° tilt

10x lossless HD zoom

90° Field of View

Full HD 1080p 30fps

H.264 UVC 1.5 with Scalable Video Coding (SVC)

Autofocus

5 camera presets

Far-end control (PTZ) of ConferenceCam products

Kensington security slot

LED to confirm video streaming

Standard tripod thread

REMOTE CONTROL

Dockable

8.5 m/28-foot range

PRODUCT SPECIFICATIONS

Logitech GROUP
Price: \$999
Part #: 960-001054
UPC: 097855118462

Expansion Mics
Price: \$299
Part #: 989-000171
UPC: 097855119551

Logitech GROUP + Expansion Mics
Price: \$1,249
Part #: 960-001060
UPC: 097855120038

GROUP 10m Extended Cable
Price: \$99
Part #: 939-001487
UPC: 097855129765

GROUP 15m Extended Cable
Price: \$199
Part #: 939-001490
UPC: 097855131942

SYSTEM REQUIREMENTS

Windows® 7, Windows 8 or Windows 10
Mac OS X® 10.7 or higher
Google Chromebook Version 29 or higher

Note: For full HD support, please check with your software application provider for system requirements.

SPEAKERPHONE

Full-duplex performance

Acoustic echo cancellation

Noise reduction technology

Ultra-wideband audio

Bluetooth and NFC wireless technology

LCD for caller ID, call duration and other functional response

LEDs for speakerphone streaming, mute, hold, and Bluetooth wireless pairing

Touch controls for call answer/end, volume and mute, Bluetooth – plus camera PTZ, "home" preset and far-end control

Microphones (Tx)

Four omni-directional microphones supporting 20-foot diameter range

Frequency response: 100Hz – 11KHz

Sensitivity: -28dB +/- 3dB

Distortion: <1% @ 1KHz at 106dB

Speakers (Rx)

Frequency response: 120Hz – 14KHz

Sensitivity: 83dB SPL +/- 3dB at 1W/1M

Max output: 91dB SPL

Distortion: <5% from 200Hz

Kensington security slot

PRODUCT DIMENSIONS + WEIGHT

Camera
146 x 131 x 130 mm
5.8 x 5.2 x 5.1"
580 g/20.46 oz

Speakerphone
240 x 65 x 240 mm
9.5 x 2.5 x 9.5"
1223 g/43 oz

Hub
94 x 34 x 74 mm
3.75 x 1.3 x 2.9"
83 g/3 oz

Remote
50 x 120 x 10 mm
1.97 x 4.72 x 0.39"
48 g/1.69 oz

Package
500 x 152 x 310 mm
19.75 x 6 x 12.25"
4.1 kgs/9 lbs

Wall/Table Mount
210 x 120 x 99 mm
8.27 x 4.72 x 3.90"
255 g/8.99 oz

Expansion Mics
83 x 83 x 21 mm
3.3 x 3.3 x 0.83"
230 g/8 oz

GROUP 10m Extended Cable
Cable/Repeater
10 m x 4 mm/50 x 12 mm
32.8' x 0.16"/1.97 x 0.47"
278 g/9.8 oz

GROUP 15m Extended Cable
Cable/Repeater
15 m x 5 mm/50 x 12 mm
49.2' x 0.20"/1.97 x 0.47"
510 g/18.0 oz

HUB/CABLE

Central mountable hub for connection of all components

Included adhesive solution for under-table mounting

Two cables for connection between hub and camera/speakerphone (Length: 5 m/16')

One USB cable for connection to PC/Mac (Length: 3 m/9.8')

AC Power adapter (Length: 3 m/9.8')

MOUNT

Dual purpose mount for wall placement or for elevating the camera on a table

COMPLIANCE AND TOOLS

USB 2.0 compliant

UVC-compliant video and audio for broad application compatibility

Certified for Skype for Business, Cisco compatible⁴, and enhanced integration with Logitech Collaboration Program (LCP) members⁵

Downloadable diagnostic tool

Field upgradeable firmware tool

Downloadable app plug-ins for advanced feature support

INSIDE THE BOX

Camera, speakerphone, remote control, two 5 m/16.4' cables for connection between speakerphone and hub and camera and hub, one 3 m/9.8' meter cable between hub and PC, Velcro for cable management, Velcro for hub to table securing, powered hub, power adapter with regional plugs, mount, quick start guide, warranty card.

WARRANTY

2-year limited hardware

чл.2 33ЛД

www.logitech.com/GROUP

To order, contact your reseller or call us at 800-308-8666

Published April 2017

Logitech Inc. 7700 Gateway Blvd., Newark, CA 94560

¹ With Skype® for Business, and Logitech Collaboration Program (LCP) members, including Vidyo, Zoom and Lifesize Cloud (refer to www.logitech.com/lcp for the latest information).

² With Skype® and Cisco Jabber®.

³ With NFC-enabled mobile devices.

⁴ See www.logitech.com/ciscocompatibility for the latest version.

⁵ Includes Blue Jeans, BroadSoft, Lifesize, Vidyo, and Zoom. See www.logitech.com/lcp for full list and the latest information.

⁶ Learn more about GROUP Extended DIN Cables at: www.logitech.com/accessories.

⁷ With Skype® for Business, Skype®, Cisco Jabber® and LCP participants with completed integrations (refer to www.logitech.com/lcp for the latest information).

© 2017 Logitech. Logitech, the Logitech logo and other Logitech marks are owned by Logitech and may be registered. All other trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice.

чл.2 33ЛД

КС чл.2 33ЛД
А В Т

4M21
чл.2 33ЛД

Products

What's Hot

Commercial

Service

Login

ASUS FX753VD

ASUS recommends Windows 10 Pro.

Processor Intel® Core™ i5 7300U Processor,
Intel® Core™ i7 7700HQ Processor,

Operating System Windows 10 Home
Windows 10 Pro - ASUS recommends Windows 10 Pro.

Chipset Intel® HM175 Express Chipset

Memory 2 x SO-DIMM socket , up to 32 GB SDRAM

Display 17.3" (16:9) LED backlit FHD (1920x1080) 60Hz Anti-Glare Panel with 45% NTSC with 178° wide-viewing angle display
17.3" (16:9) LED backlit UHD (3840x2160) 60Hz Anti-Glare Panel with 72% NTSC with 178° wide-viewing angle display

Graphic NVIDIA , with 2GB/4GB GDDR5 VRAM

Storage Hard Drives:

1TB 5400RPM SATA HDD

1TB 7200RPM SATA HDD

2TB 5400RPM SATA HDD

Solid State Drives:

128GB/256GB/512GB SATA3 M.2 SSD

Solid State Drives:

128GB/256GB/512GB PCIE Gen3X4 SSD

Optical Drive Super-Multi DVD

Keyboard Illuminated Chiclet Keyboard

Card Reader Multi-format card reader

WebCam HD Web Camera

Networking Wi-Fi

Integrated 802.11b/g/n

Integrated 802.11 AC

Interface 3 x USB 3.0 port(s)

1 x USB 2.0 port(s)

1 x USB-C Gen 1 (up to 5 Gbps)

1 x RJ45 LAN Jack for LAN insert

1 x HDMI

Battery 4 Cells

mAh 48 Whrs Battery

Power Adapter Plug Type :ø5.5 (mm)

19 V DC, 6.32 A, 120 W

Dimensions 418 x 255 x 30 ~ cm (WxDxH)

Weight 2.8 kg with Battery

чл.2 33ЛД

ВАРНО С ОРИГИНАЛА

КО
АД 1

чл.2 33ЛД

чл.2 33ЛД

Lenovo
чл.2 33ЛД

ASUS FX753VD

Процесор: Intel® Core™ i5 7300U процесор,
Intel® Core™ i7 процесор 7700HC,

Оперативна памет: Windows 10 Начало
Windows 10 Pro - ASUS препоръчва Windows 10 Pro

Чипсет: Intel® HM175 Express Chipset

Памет: 2 x SO-DIMM гнезда, до 32 GB SDRAM

Екран: 17.3" (16:9) LED задно FHD (1920x1080) 60Hz антирефлексно панел
с 45% NTSC с 178° дисплей с широк ъгъл на гледане
17.3" (16:9) LED задно UHD (3840x2160) 60Hz антирефлексно панел с 72% NTSC с 178°
дисплей ъгъл голям зрителен

чл.2 33ЛД

Графика: NVIDIA, с 2 GB / 4 GB GDDR5 VRAM

Поддръжка: Твърди дискове:

1TB 5400RPM SATA HDD 1TB

7200RPM SATA HDD 2TB

5400RPM SATA HDD твърди

дискове:

128GB / 256GB / 512GB SATA3 M.2 SSD твърди

дискове:

128 GB / 256GB / 512 GB PCIe Gen3x4 SSD

Устройства: Super-Multi DVD

Клавиатура: Осветена клавиатура Chiclet

чл.2 33ЛД

ПРЕНО С ОПТИМИЗАЦИЯ

чл.2 33ЛД

4mly
чл.2 ЗЗЛД

Модел на видео форматта

HD веб камера

Wi-Fi

Интегрирана 502 11b / g / n

интегрирана 802.11 AC

3 x USB 3.0 порт (и)

1 x USB 2.0 порт (и)

1 x USB-C Gen 1 (до 5 Gbps) 1 x RJ45

LAN Jack за LAN влохса 1 x HDMI

4 клетки на 48

Whrs Батерията

Plug Type: ø5.5 (мм)

19 V DC, 6.32 A, 120 W

418 x 255 x 30 – см (ШxДxВ)

2,8 кг с Батерия

чл.2 ЗЗЛД



- Продукти сертифицирани от Федералните комисии по комуникациите и промишлеността на Канада ще бъдат разпределили в Съединените щати и Канада. Моля, посетете интернет сайта на ASUS CAЩ и Канада ASUS информация за наличните местни продукти.
- Всички спецификации подлежат на промяна без предизвестие. Моля, консултирайте се с вашия доставчик за точните спецификации. Продукти, които не могат да бъдат включени на всички пазари.
- Техническите характеристики варират в зависимост от модела, и всички изобихват от варианти. Моля, посетете спецификационните страници за пълни подробности.
- PCB цвят и пакетни софтуерни версии могат да бъдат променени без предизвестие. Марки и продукти.
- Моля, спомогнете ни във търговски маркет на съответните компании.

Облако данни е все още друго, всички приложения се използват се основават на съответно производство. Действителни цифри могат да варират в различни географски ситуации

ПАРНО С ОРИГИНАЛА

чл.2 ЗЗЛД

чл.2 ЗЗЛД

Lam.

чл.2 33ЛД

Ultrabook, Celeron, Celeron Вътре Ядро Inside, Intel, Intel Logo, Intel Atom, Intel Atom Inside, Intel Core Intel Inside, Intel Inside Logo, Intel VPRO, Intelm, Intelm Вътре Pentium, Pentium Вътре VPRO Вътре Xeon, Xeon Phi и Xeon Inside са търговски марки на Intel Corporation или негови клонове в САЩ и / или други държави.

Спецификация на продукта може да се различава от страна в страна. Препоръчваме ви да се консултирате с вашите местни дилъри за спецификациите на продукта, местни или валиди страни. Цветното на продукта, които на снимат се бидат възможно точно корабни единици, прикрити от фотография и наблюдават сайта. Все да фотографират променливи условия, всички вид на продукта могат да се различават от използванията, показани на тази сайт. ASUS от ни се стремим да представим най-точна и ясна информация на адресата на публикуването, но не гарантираме продукт да бъде произведен без недостатъци.

Резултат от Mobile Mark 2011 офис продуктивност

Има ли още?

Кои са то нши

Услуги и услуги

Общност

Обслужване и поддръжка

Обслужване и поддръжка

Обслужване и поддръжка

© ASUS/ASUS Computer Inc. Всички права запазени.

чл.2 33ЛД

КОПИО С ОРИГИНАЛА

чл.2 33ЛД

КОПИО С ОРИГИНАЛА
АД 1

чл.2 33ЛД

чл.2 33ЛД

DICOTA

Multi BASE 15-17.3

Lightweight notebook case with protective function



Live smart with MULTI BASE! The handy clamshell case protects your notebook perfectly thanks to the cushioned notebook compartment with metal wire frame. This lightweight notebook case guarantees flexible mobility - both professionally and privately. Give your life a little colour. The case is available in blue, red, grey and black. Available in May 2014.

Your 15-17.3" notebook is not only optimally protected, it can also be securely fixed into the compartment using a strap. The front pocket provides space for accessories. So all your important things are handy at all times. The shoulder strap is removable. Thanks to its comfortable carry handle, the case is comfortable to hold and can be instantly fixed to the trolley using the integrated strap - the smart case from the lightweight class!

чл.2 33ЛД

Screen size: 15 - 17.3 inches
Art.No: D30447-V1
Weight: 0.9kg / 1lbs, 14.0 ounces
Material: Polyester
Compatible devices:

 ≤ 16.54 x 11.61 x 1.77 inches
≤ 420 x 295 x 45 mm

 ≤ 17.72 x 13.19 x 2.56 inches
≤ 450 x 335 x 65 mm

- Cushioned notebook compartment with metal wire frame for extra protection
- Notebook strap keeps the notebook securely in place in the compartment
- Front pocket with room for accessories
- Comfortable handle
- Slip pocket for documents at the back of the case
- Removable shoulder strap



DICOTA SCHWEIZ AG
Schwerzistrasse 20
8807 Freienbach
Switzerland

www.dicota.com
info@dicota.com

чл.2 33ЛД

чл.2 33ЛД

СММ:
чл.2 33ЛД

Power supply PS23E
Thread adapter: 31B1856

SYSTEM TECHNICAL SPECIFICATIONS

Compatible systems per frequency band (up to): 12
Selectable frequencies: 150
Auto Setup Features: QuickScan : Finds group with most compatible frequencies and sets to best frequency
Audio Reference Companding: No
Included Antennas: BLX4, BLX88: Internal, BLX4R: Detachable
Antenna Options: No
Receiver Network Ability: No
PC Control: No
Rack Hardware: URT2 (not included), Rack mount brackets (only with rackable/BLX-R Sets)
Case: Included Only with BLX4 Sets
Transmitter Display: LED
Receiver Display: BLX4, BLX88: LED, BLX4R: High-resolution LCD screen
Battery, Endurance: 2AA, up to 14h
Environment: Daily Touring

FURTHER TECHNICAL SPECS

Operating Range: 91 m (line of sight - actual range depends on RF signal absorption, reflection and interference)
Available Frequencies: Between 524–865 MHz (available frequencies depend on applicable regulations in country where system used)
Audio Range: 50–15,000 Hz (dependent on microphone type)
Transmitter RF Output Power: 10 mW, typical (varies by region)
Audio Output Connector: XLR and 1/4" (6.3 mm) unbalanced Maximum Output Level: -27 dBV (XLR, mic level), -13 dBV (1/4")
Battery Life: Up to 14 hours
Dynamic Range: 100 dB A-weighted
System Distortion: 0.5% THD typical (ref. +/- 38 kHz deviation, 1 kHz tone)
Operating Temperature Range: -18°C (0°F) – +50°C (122°F)
Power Requirements: BLX1, BLX2: 2 AA alkaline or rechargeable batteries
BLX4: 12–18 V DC at 150 mA, supplied by external power supply

COMPONENT SPECIFICATIONS:

BLX4 RECEIVER

Output Impedance:
- XLR connector 200 Ω
- 6.35 mm (1/4") connector: 50 Ω
Audio Output Level Ref. ± 33 kHz deviation with 1 kHz tone:
- XLR connector -27 dBV (into 100 k Ω load)
- 6.35 mm (1/4") connector -13 dBV (into 100 k Ω load)
RF Sensitivity: 105 dBm for 12 dB SINAD, typical
Image Rejection: >50 dB, typical
Dimensions: 40 mm X 188 mm X 103 mm (H x W x D)
Weight: 241 g
Housing: Molded ABS

Power Requirements: 12–15 V DC @ 160 mA, supplied by external power supply (tip positive)

BLX2 HANDHELD TRANSMITTER

Audio Input Level
- gain 0dB: -20 dBV maximum
- gain -10dB: -10 dBV maximum
Gain Adjustment Range: 10 dB
RF Transmitter Output: 10 mW, typical, varies by region
Dimensions: 224 mm X 53 mm dia.
Weight: 218 g (without batteries)

чл.2 33ЛД

чл.2 33ЛД

КОИ чл.2 33ЛД
АМ 1

Multi BASE 15-17.3

Олекотена чанта за преносим компютър със защитна функция

Живей умно със серията на Dicota чанти Multi BASE! Удобен съвсем калъф предпазва вашия преносим компютър перфектно, благодарение на омекотено отделение за преносим компютър с метална телесна рамка. Тази лека чанта за преносим компютър гарантира гъвкава мобилност както за работа, така и за лично ползване. Осигурете си малко уют. Чантата се предлага в синьо, червено, сиво и черно. Налична за продажба от през май 2014 година.



Вашият 15-17.3" лаптоп е не само оптимално защитен, а също може да бъде здраво закрепен в отделението, с помощта на калъка. Предният джоб осигурява пространство за аксесоари. Така че всички важни неща са удобни по всяко време, презрамка е подвжката. Благодарение на комфортна дръжка за носене, чантата е удобна за ходене и може да бъде неземчно фиксирана към колянката с помощта на интегриран калъка – това е вашето интелигентно решение от класа на олекотените модели!

чл.2 ЗЗЛД

Размер на екрана: 15 - 17.3 инча

Art.No: D30447 V1

Тегло: 0.9кг / 2лб, 14.0 унции

Материал: полиестер

местими
стройств

≤ 16.54 x 11.61 x 1.77 инча ≤ 420 x 295 x 45 мм

≤ 17.72 x 13.19 x 2.56 инча ≤ 450 x 335 x 65 мм

- Омекотено отделение за преносим компютър с метална телесна рамка за допълнителна защита
- Калъка за Notebook държи лаптопа на сигурно място в отделение
- Преден джоб с място за аксесоари
- Удобна дръжка
- Джоб за документи в задната част
- Свалница се презрамка



DICOTA SCHWEIZ AG
Schwerzistrasse 20 8807
Freienbach Швейцария

www.dicota.com
info@dicota.com

чл.2 ЗЗЛД

чл.2 ЗЗЛД

47711
чл.2 33ЛД



Вокален безжичен микрофон SHURE - Модел BLX24E/SM58-K3E

чл.2 33ЛД

BLX24E/SM58 - безжична микрофонна система с SM58 микрофонна капсула. Преносим куфар.

Включва: BLX4 single-channel receiver, BLX2/SM58 handheld transmitter, microphone clip, power supply, 2 AA batteries, and user guide.

Industry-standard professional microphones for daily touring, club and studio performances.

SM58 VOCAL MICROPHONE

Frequency response tailored for vocals, with brightened midrange and bass rolloff

Uniform cardioid pickup pattern isolates the main sound source and minimizes background noise

Pneumatic shock-mount system cuts down handling noise

Effective, built-in spherical wind and pop filter

Supplied with break-resistant stand adapter which rotates 180 degrees

Legendary Shure quality, ruggedness and reliability

Cardioid (unidirectional) dynamic

Frequency response: 50 to 15,000 Hz

BLX2 HANDHELD TRANSMITTER

Power and battery status LED

Adjustable gain control

Quick and easy frequency matching

AA batteries (included) provide up to 14 hours of continuous use

100 m (300 ft.) operating range (line of sight)

RECEIVER BLX4

Up to 12 compatible systems (region dependent)

Microprocessor-controlled internal antenna diversity

One touch QuickScan locates the best open frequency

¼" and XLR audio outputs

Two color audio status indicator LED

FURNISHED ACCESSORIES

Carrying case, part number: 95D16526

Swivel adapter, part number: 90F4046

чл.2 33ЛД

БЯНО С ОРИГИНАЛА

чл.2 33ЛД

КОПИРАК
А Д 1

5M711
чл.2 33ЛД

Housing: Molded ABS
Power Requirements: 2 LR6 AA batteries, 1.5 V, alkaline
Battery Life: up to 14 hours (alkaline)

чл.2 33ЛД

ВЯРНО С ОРИГИНАЛА

КОП
А Д чл.2 33ЛД

чл.2 33ЛД

4m1,
чл.2 33ЛД



Безжичен микрофон брошка SHURE - Модел BLX14E/CVL-K3E lavalier

BLX14E/CVL - безжична лавалиерна система с CVL (тип брошка) Включва: CVL lavalier microphone, BLX1 bodypack transmitter, BLX4 single-channel receiver, power supply, 2 AA batteries

BLX1 Up to 14 hours of continuous use with 2 AA batteries. 300 ft (100 m) transmission radius.

BLX4 Single channel wireless receiver with microprocessor-controlled internal antenna diversity.

CVL Condenser lavalier microphone for use with PG Wireless Systems. Discreet, miniature clip-on lavalier microphone for speeches and presentations
Condenser cartridge with cardioid polar pattern

CVL LAVALIER MICROPHONE

Electret condenser microphone

Cardioid polar pattern

Clothing clip for secure placement

Acoustic windscreen minimizes wind noise in outdoor applications

SYSTEM TECHNICAL SPECIFICATIONS

Compatible systems per frequency band (up to): 12

Selectable frequencies: 150

Auto Setup Features: QuickScan : Finds group with most compatible frequencies and sets to best frequency

Audio Reference Companding: No

Included Antennas: BLX4, BLX88: Internal, BLX4R: Detachable

Antenna Options: No

Receiver Network Ability: No

PC Control: No

Rack Hardware: URT2 (not included), Rack mount brackets (only with rackable/BLX-R Sets)

Case: No

Transmitter Display: LED

Receiver Display: BLX4, BLX88: LED, BLX4R: High-resolution LCD screen

Battery, Endurance: 2AA, up to 14h

Environment: Small to medium stages

FURTHER TECHNICAL SPECS

Operating Range: 91 m (line of sight - actual range depends on RF signal absorption, reflection and interference)

Available Frequencies: Between 524–865 MHz (available frequencies depend on applicable regulations in country where system used)

чл.2 33ЛД

чл.2 33ЛД

КОН
АД
1
чл.2 33ЛД

2011,
чл.2 33ЛД

Audio Range: 50–15,000 Hz (dependent on microphone type)
Transmitter RF Output Power: 10 mW, typical (varies by region)
Audio Output Connector: XLR and 1/4" (6.3 mm) unbalanced Maximum Output Level: -27 dBV (XLR, mic level), -13 dBV (1/4")

Battery Life: Up to 14 hours

Dynamic Range: 100 dB A-weighted

System Distortion: 0.5% THD typical (ref. +/- 38 kHz deviation, 1 kHz tone)

Operating Temperature Range: -18°C (0°F) – +50°C (122°F)

Power Requirements: BLX1, BLX2: 2 AA alkaline or rechargeable batteries

BLX4: 12–18 V DC at 150 mA, supplied by external power supply

COMPONENT SPECIFICATIONS:

BLX4 RECEIVER

Output Impedance:

- XLR connector 200 Ω

- 6.35 mm (1/4") connector: 50 Ω

Audio Output Level Ref. \pm 33 kHz deviation with 1 kHz tone:

- XLR connector -27 dBV (into 100 k Ω load)

- 6.35 mm (1/4") connector -13 dBV (into 100 k Ω load)

RF Sensitivity: 105 dBm for 12 dB SINAD, typical

Image Rejection: >50 dB, typical

Dimensions: 40 mm X 188 mm X 103 mm (H x W x D)

Weight: 241 g

Housing: Molded ABS

Power Requirements: 12–15 V DC @ 160 mA, supplied by external power supply (tip positive)

BLX1 BODYPACK TRANSMITTER

Audio Input Level:

- gain max: -16 dBV maximum

- gain min (0 dB): +10 dBV maximum

Gain Adjustment Range: 26 dB

Input Impedance: 1 M Ω

RF Transmitter Output: 10 mW, typical, varies by region

Dimensions: 110 mm x 64 mm x 21 mm (H x W x D)

Weight: 75 g, without batteries

Housing: Molded ABS

Power Requirements: 2 LR6 AA batteries, 1.5 V, alkaline

Battery Life: up to 14 hours (alkaline)

чл.2 33ЛД

чл.2 33ЛД

КОПИЮ С ОРИГИНАЛА

КОПИЮ С ОРИГИНАЛА
чл.2 33ЛД

Чл.2 33ЛД

Lite Series | DH-SD22204T-GN



DH-SD22204T-GN

2MP 4x PTZ Network Camera



- 1/2.7" 2Megapixel CMOS
- Powerful 4x optical zoom
- Support Triple-streams encoding
- WDR, Day/Night(ICR), Ultra DNR
- Max. 25/30fps@1080P
- IVS
- Support PoE
- Max 100°/s pan speed
- IP66, IK10



System Overview

Featuring powerful optical zoom and accurate pan/tilt/zoom performance, the camera provides a wide monitoring range and great detail. The camera delivers 4MP resolution at 25/30fps. The camera is equipped with smooth control, high quality image, and good protection, meeting compact size demands of video surveillance applications.

Functions

Wide Dynamic Range

The camera achieves vivid images, even in the most intense contrast lighting conditions, using industry-leading wide dynamic range (WDR) technology. For applications with both bright and low lighting conditions that change quickly, True WDR (120 dB) optimizes both the bright and dark areas of a scene at the same time to provide usable video.

Smart H.264+

Delivering high quality video without straining the network, Smart H.264+ is the optimized implementation of H.264. The Smart H.264+ encoding platform includes a scene adaptive encoding strategy, dynamic GOP, dynamic ROI, flexible multi-frame reference structure and intelligent noise reduction, providing a savings of up to 70% of bandwidth and storage when compared with standard H.264.

Environmental

Dahua cameras operate in extreme temperature environments, rated for use in temperatures from -30 °C to +60 °C (-22 °F to +140 °F) with 95% humidity. The camera complies with the IK10 Vandal Resistance impact rating making it capable of withstanding the equivalent of 55 kg (120 lbs) of force. Subjected to rigorous dust and water immersion tests and certified to the IP66 Ingress Protection rating makes it suitable for demanding outdoor applications.

Interoperability

The camera conforms to the ONVIF (Open Network Video Interface Forum) and PSIA (Physical Security Interoperability Alliance) specifications, ensuring interoperability between network video products regardless of manufacturer.

Чл.2 33ЛД

ВЕРНО С ОРИГИНАЛОМ

ONVIF PSIA

www.dahuasecurity.com

Чл.2 33ЛД

КОПИ Чл.2 33ЛД
АД 1

Lite Series | DH-SD22204T-GN

Technical Specification

Camera

Image Sensor	1/2.7" CMOS
Effective Pixels	1920(H) x 1080(V), 2 Megapixels
RAM/ROM	256M/128M
Electronic Shutter Speed	1/1s~1/30,000s
Scanning System	Progressive
Minimum Illumination	Color: 0.05Lux@F1.6, B/W: 0.005Lux@F1.6
S/N Ratio	More than 50dB
IR Distance	N/A
IR On/Off Control	N/A
IR LEDs	N/A

Lens

Focal Length	2.7mm~11mm
Max. Aperture	F1.6
Angle of View	H: 112.5° ~ 30°
Optical Zoom	4x
Focus Control	Auto/Manual
Close Focus Distance	100mm~ 1000mm

DORI Distance

*Note: The DORI distance is a "general proximity" of distance which makes it easy to pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specification and lab test result according to EN 62676-4 which defines the criteria for Detect, Observe, Recognize and Identify respectively.

Detect	Observe	Recognize	Identify
120m(394ft)	48m(157ft)	24m(79ft)	12m(39ft)

PTZ

Pan/Tilt Range	Pan: 0° ~ 355°; Tilt: 0° ~ 90°
Manual Control Speed	Pan: 0.1° ~ 100° /s; Tilt: 0.1° ~ 60° /s
Preset Speed	Pan: 100° /s; Tilt: 60° /s
Presets	300
PTZ Mode	8 Tour, Auto Pan
Speed Setup	Human-oriented focal Length/ speed adaptation
Power up Action	Auto restore to previous PTZ and lens status after power failure
Idle Motion	Activate Preset/Tour if there is no command in the specified period
Protocol	DH-SD

Intelligence

Auto Tracking	N/A
IVS	Tripwire, Intrusion, Abandoned/Missing, Face Detection

Video

Compression	H.264+/H.264/MJPEG
Streaming Capability	3 Streams
Resolution	1080P(1920x1080)/720P(1280x720)/D1(704x576/704x480)/CIF(352x288/352x240) Main stream: 1080P/720P/D1 (1 ~ 25/30fps) Sub stream1: D1/CIF(1 ~ 25/30fps) Sub stream2: 720P/D1/CIF (1 ~ 25/30fps)
Frame Rate	
Bit Rate Control	CBR/VBR
Bit Rate	H.264+/H.264: 448K ~ 8192Kbps, MJPEG: 5120K ~ 10240Kbps
Day/Night	Auto(ICR) / Color / B/W
Backlight Compensation	BLC / HLC / WDR (120dB)
White Balance	Auto, ATW, Indoor, Outdoor, Manual
Gain Control	Auto / Manual
Noise Reduction	Ultra DNR (2D/3D)
Motion Detection	Support
Region of Interest	Support
Electronic Image Stabilization (EIS)	N/A
Defog	Support
Digital Zoom	16x
Flip	180°
Privacy Masking	Up to 24 areas

Network

Ethernet	RJ-45 (10Base-T/100Base-TX)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, JGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x
Interoperability	ONVIF, PSIA, CGI
Streaming Method	Unicast / Multicast
Max. User Access	20 users
Edge Storage	NAS (Network Attached Storage), Local PC for instant recording, Micro SD card 128GB
Web Viewer	IE, Chrome, Firefox, Safari
Management Software	Smart PSS, DSS
Smart Phone	IOS, Android
Certifications	CE: EN55032/EN55024/EN50130-4 FCC: Part15 subpartB, ANSI C63.4-2014 UL: UL60950-1+CAN/CSA C22.2, No 60950-1

чл.2 33ЛД

Чл.2 33ЛД

Lite Series | DH-SD22204T-GN

Interface

Video Interface	N/A
RS485	N/A
Audio I/O	N/A
Alarm I/O	N/A

Electrical

Power Supply	DC 12V/1.5A, PoE(802.3af)
Power Consumption	10W

Environmental

Operating Conditions	-30°C ~ 60°C (-22°F ~ +140°F) / Less than 95% RH
Ingress Protection	IP66
Vandal Resistance	IK10

Construction

Casing	Metal
Dimensions	Ø122 (mm) x 89 (mm)
Net Weight	0.66kg(1.46lb)
Gross Weight	0.71kg(1.57lb)

Ordering Information

Type	Part Number	Description
2MP PTZ Camera	DH-SD22204T-GN	2MP 4x PTZ Network Camera, WDR, PAL
	DH-SD22204TN-GN	2MP 4x PTZ Network Camera, WDR, NTSC
	SD22204T-GN	2MP 4x PTZ Network Camera, WDR, PAL
	SD22204TN-GN	2MP 4x PTZ Network Camera, WDR, NTSC
Accessories	PFA137	Mount Adapter
	DC12V/2A	Power Adapter
	PFB203W	Wall Mount
	PFB200C	In-ceiling Mount
	PFA152-E	Pole Mount

Accessories

Optional:



PFA137
Mount Adapter



DC12V/2A
Power Adapter



PFB203W
Wall Mount



Pole Mount




PFB200C
Ceiling Mount

Чл.2 33ЛД

Wall Mount	In-ceiling Mount
PFB203W	PFB200C
Junction Box Mount	Pole Mount
PFA137	PFB203W + PFA152-E

Чл.2 33ЛД

Dimensions (mm)

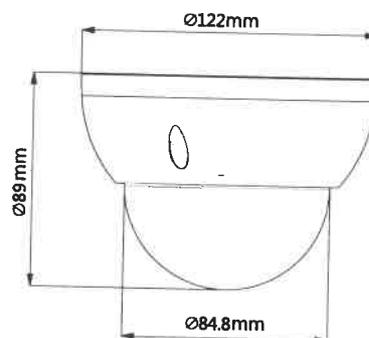

СМЛ
чл.2 ЗЗЛД

Lite Series | DH-SD22204T-GN



DH-SD22204T-GN

2MP 4x PTZ Network Camera



- 1 / 2.7 "2Megapixel CMOS
- Мощен и 4x оптично мащабиране
- Поддръжка Triple-потоци кодиране
- WDR, Day / Night (ICR), Ultra СНП
- Макс. 25 / 30fps @ 1080P
- IVS
- Подкрепа PoE
- Максимална скорост 100 ° / и тиган
- IP66, IK10



чл.2 ЗЗЛД

Преглед на системата

С участието на мощен оптичен зум и точно изпълнение панорама / наклон / увеличение, камерата предлага широка гама мониторинг и големи подробности. Камерата осигурява резолюция 4MP на 25/30 кадъра в секунда. Камерата е оборудвана с плавно управление, високо качество на изображението, както и добра защита, среща компактни искания размер на приложения за видео наблюдение.

Функции

С широк динамичен обхват

Камерата постига ярки образи, дори и в най-интензивните условия контраст осветление, като се използва водещата в индустрията технология широк динамичен обхват (WDR). За приложения с двете светли и слаба светлина, които се променят бързо, True WDR (120 db) оптимизира както светлите и тъмните области на сцена в същото време да се осигури използваема видео.

Смарт Н.264 +

Осигури висококачествени видео без да натоварва мрежата, Smart H.264 + е оптимизирана версия на H.264. Smart H.264 кодиране + Платформата включва сцена адаптивна стратегия кодиране, динамичен GOP, динамичен ROI, гъвкав референтен мулти-рамкова конструкция и интелигентен за намаляване на шума, осигурявайки икономии до 70% от трафик и съхранение в сравнение със стандартната H.264.

опазване на околната среда

Dahua камери работят при екстремни температурни условия, оценени за използване при температури от -30 ° C до 60 ° C (-22 ° F до 140 ° F) с 95% влажност. Камерата е в съответствие с Оценката на въздействието IK10 Vandal Resistance което го прави способен да издържи на равностойността на 55 кг (120 паунда) на сила. Предмет на обстоен тестове прах и потапяне във вода и сертифицирани за рейтинг IP66 Ingress Защита го прави подходящ за високотелни приложения на открито.

оперативна съвместимост

Камерата отговаря на ONVIF (Open Network Video Interface Forum) и PSIA (Physical Security Alliance оперативна съвместимост) спецификации катיוни, осигуряване на оперативна съвместимост между мрежовите видео продукти независимо от производителя.

ИЗПЪЛНЕНО С ОРИГИНАЛАТА

ONVIF PSIA

www.dahuasecurity.com

чл.2 ЗЗЛД

КОПИЯ ЧЛ.2 ЗЗЛД

чл.2 33ЛД

Lite Series | DH-SD22204T-GN

Техническа Спецификация

Камера

сензор за изображения	1 / 2.7 CMOS
ефективни пиксели	1920 (H) x 1080 (V), 2 мегапиксела
RAM / ROM	256M / 128M
Електронен скорост на затвора	1/1 S ~ 1 / 30,000s
Сканиране на системата	програвиран
Минимално осветление	Цвят: 0.05Lux@F1.6; B / W: 0.005Lux@F1.6
S / N съотношение	Повече от 50 db
IP Разстояние	N / A
IP On / Off контрол	N / A
IR осветление	N / A
Лици	
Фокусно разстояние	2,7 мм ~ 11 милиметра
Макс. апертура	F1.6
Ъгъл на видимост	H: 112,5 ° ~ 30 °
оптично увеличение	4x
Фокус Control	Auto / Manual
Близко разстояние за фокусиране	100mm ~ 1000 милиметра
DORI Разстояние	
* Забележка: Разстоянието DORI е "обща близост" на разстояние, което го прави лесно да се определят точно дясната камера за вашите нужди. Разстоянието DORI се изчислява въз основа на спецификацията сензор и резултат лаборатория за изпитване в съответствие с EN 62676-4, който определя критериите за разпознаване, Наблюдавайте, Разпознава и идентифицират съответно.	
Откриване	наблюдавам Разпознава Идентифицирайте
120 м (394 фута)	48m (157 фута) Двайсет и четири метра (79 фута) (39 фута)
PTZ	
Pan / Tilt Range	Pan: 0 ° ~ 355 °, Наклон: 0 ° ~ 90 °
Ръчен контрол на скоростта	Pan: 0.1 ° ~ 100 ° / сек, Наклон: 0.1 ° ~ 60 ° / сек
предварително зададената скорост	Пан: 100 ° / S, Наклон: 60 ° / сек
пресети	300
PTZ Mode	8 Tour, Auto Pan
Speed Setup	Дължина / адаптация фокусно Човешки ориентирани скорост
Мощност действие	Автоматично възстановяване на предната PTZ и състоянието на обектива след спиране на тока
Idle Motion	Активирайте Preset / Tour, ако няма команда в определения срок
протокол	DH-SD
интелигентност	
проследяване на автоматизиран	N / A
IVS	Трикове, Intrusion, Изоставен / липсващ, разпознаване на лица

Видео

компресия	H.264 + / H.264 / MJPEG
Streaming Capability	3 потоци
Резолюция	1080P (1920 x 1080) / 720P (1280 x 720) / D1 (704 x 576/704 x 480) / CIF (352 x 288/352 x 240) Главния поток: 1080P / 720P / D1 (1 ~ 25/30 кадъра)
Frame Rate	Под stream1: D1 / CIF (1 ~ 25/30 кадъра) Под stream2: 720P / D1 / CIF (1 ~ 25/30 кадъра)
Bit Rate Control	CBR / VBR
Битрейт	H.264 + / H.264: 448K ~ 8192Kbps, MJPEG: 5120K ~ 10240Kbps
Ден нощ	Auto (ICR) / Color / B / W
Компенсация на зърното осветяване	BLC / HLC / WDR (120 db)
Бял баланс	Auto, ATW, закрито, Не открито, Ръчен
Придобиване контрол	Auto / Manual
Намалване на шума	Ultra DNR (2D / 3D)
Датчик за движение	поддържа
Област на интереси	поддържа
Електронен стабилизатор на изображението (EIS)	N / A
Defog	поддържа
Digital Zoom	15x
Flip	180 °
Декларация за масоциране	До 24 области
Мрежа	
Ethernet	RJ-45 (10Base-T / 100Base-TX)
Wi-Fi	N / A
протокол	IPV4 / IPV6, HTTP, HTTPS, SSL, TCP / IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP филтър, QoS, Bonjour, 802.1x
оперативна съвместимост	ONVIF, PSIA, CGI
Streaming Метод	Unicast / Multicast
Макс. достъп на потребител	20 потребители
Edge съхранение	NAS (Network Attached Storage), Local PC за миг запис, Micro SD карта 128GB
Web Viewer	IE, Chrome, Firefox, Safari
Софтуер за управление	Smart PSS, DSS
смартфон	iOS, Android
Сертификати	
Сертификати	CE EN55032 / EN55024 / EN50130-4 FCC: Part15 subpartB, ANSI C63.4-2014 UL: UL60950-1 + CAN / CSA C22.2, No.60950-1

чл.2 33ЛД

чл.2 33ЛД

чл.2 33ЛД

КОИ
АД

62711
чл.2 33ЛД

Lite Series | DH-SD22204T-GN

интерфейс	
Видео Interface	N/A
RS485	N/A
Аудио I / O	N/A
Аларма I / O	N/A
Електрически	
Захранване	DC 12V / 1.5A, PoE (802.3af)
Консумация на енергия	10W
опазване на околната среда	
условия за експлоатация	-30 ° C ~ 60 ° C (-22 ° F ~ + 140 ° F) / по-малко от 95% RH
Защита Ingress	IP66
Vandal Resistance	IK10
строителство	
обивка	метал
Размери	
Нето тегло	0.66 килограм (1.46lb)
Брутно тегло	0.71 кг (1.57lb)

Информация за поръчка

Тип	Номер на частта	описание
2MP камера PTZ	DH-SD22204T-GN	2MP 4x PTZ Network Camera, WDR, PAL
	DH-SD22204TN-GN	2MP 4x PTZ Network Camera, WDR, NTSC
	SD22204T-GN	2MP 4x PTZ Network Camera, WDR, PAL
	SD22204TN-GN	2MP 4x PTZ Network Camera, WDR, NTSC
аксесоари	PFA137	Mount адаптер
	DC12V / 2A	адаптер за захранване
	PFB203W	монтиране на стена
	PFB200C	В тавана глинината
	PFA152-E	Pole Mount

аксесоари

по избор :



PFA137 Mount
адаптер



адаптер




PFB203W
монтиране на стена



PFA152-E
Pole Mount




PFB200C монтаж
на таван на DC12V/2A

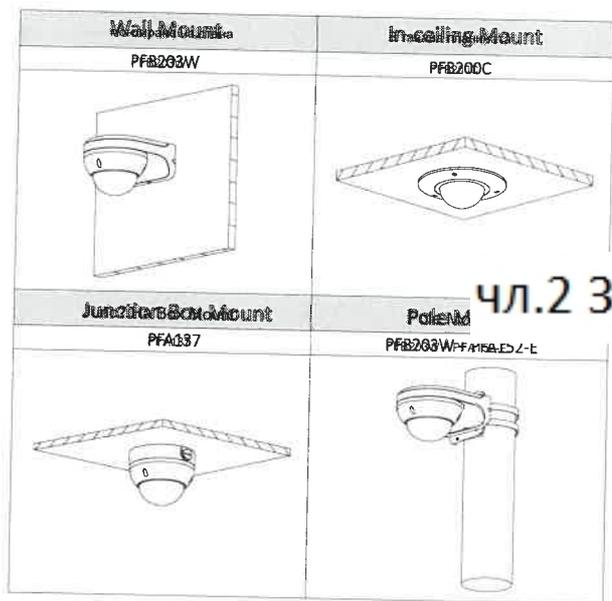

чл.2 33ЛД

Размери (mm)

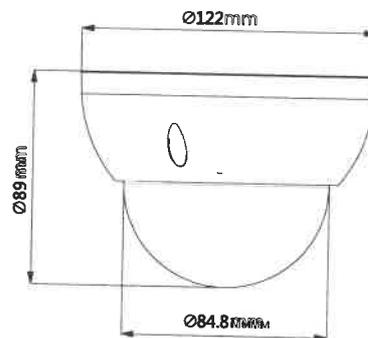

ТЕЖНО С ОПРИГВАНДА



чл.2 33ЛД

КОЛТРАКТИ
А чл.2 33ЛД

5M/1
чл.2 33ЛД

Camera Mount Series | DH-PFB203W



DH-PFB203W
Water-proof Wall Mount Bracket



чл.2 33ЛД

Features

- Aesthetic design
- Water-proof wall mount bracket
- Material: aluminum & SECC

КОПИ С ОРЪГИНАЛА

www.dahuasecurity.com

чл.2 33ЛД

КОПИ чл.2 33ЛД
1

чл.2 33ЛД

Camera Mount Series | DH-PFB203W


Technical Specifications

Model	DH-PFB203W
General	
Material	Aluminum & SECC
Dimension(WxHxD)	160mmx122mmx76mm (6.30"x4.80"x2.99")
Weight	0.5kg(1.1lb)
Load Bearing	1kg(2.2lb)
Color	White
Operating Temperature	-40°C ~ +60°C (-40°F ~ +140°F)
Humidity	<90% RH
Applicable Model	Please see "Accessory Selection"

Order Information

Type	Part Number	Description
Camera Mount	DH-PFB203W	Wall mount bracket
	PFB203W	Wall mount bracket

Dimensions (mm/inch)

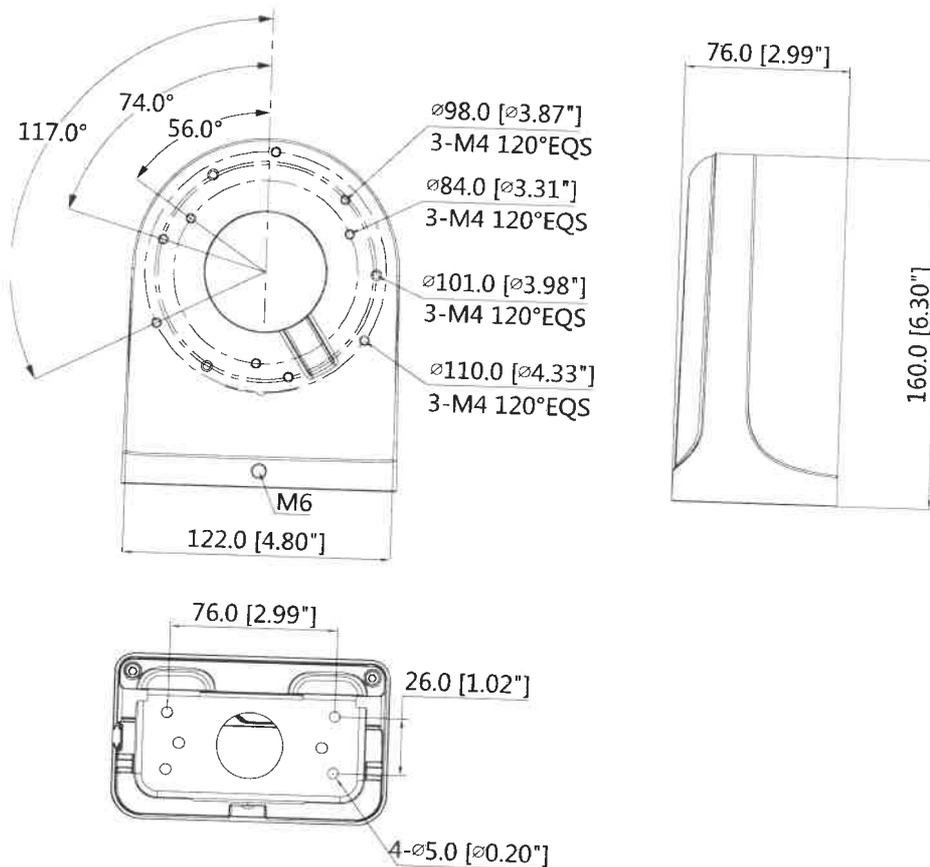

чл.2 33ЛД

www.dahuasecurity.com

чл.2 33ЛД

ВАЖНО С ОРИГИНАЛОМ


КОР чл.2 33ЛД
А В 1

СМ 111

чл.2 33ЛД

Camera Mount Series | DH-PFB203W

Application

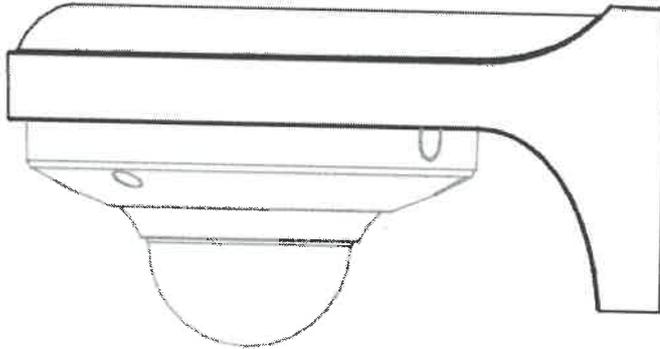

Package Information

- Wall mount bracket *1
- M4 screw *3
- ST4 screw *4
- Plastic anchor *4
- Wrench *1

чл.2 33ЛД

1.001.
чл.2 33ЛД

Камера Mount Series | DH-PFB203W



DH-PFB203W

Водоустойчив стойка за степен монтаж



[Signature]
чл.2 33ЛД

Характеристика

- Естетична дизайн
- Водоустойчив стойка за степен монтаж
- Материал: алуминий и SECC

КОПИ С ОРИГИНАЛА

www.dahuasecurity.com

[Signature] чл.2 33ЛД

[Signature]
КОПИ чл.2 33ЛД
А Д *[Signature]*

чл.2 33ЛД

Камера Mount Series | DH-PFB203W


Технически спецификации

Модел	DH-PFB203W
Общ	
Материал	Алуминиеви & SECC
Размери (ШхВхД)	160mmx122mmx76mm (6.30 "x4.80" x2.99 ")
тегло	0.5 кг (1.1lb)
Товароустойчивият	Един килограм (2.2lb)
цвет	бял
Работна температура	-40 ° ~ 60 ° C (-40 ° F ~ 140 ° F)
влажност	<90% RH
Приложимо Модел	Моля, вижте "Избор на аксесоари"

информация за поръчка

Тип	Номер на частта	описание
Камера Mount	DH-PFB203W	Стойка за стенов монтаж
	PFB203W	Стойка за стенов монтаж

Размери (mm / инч)

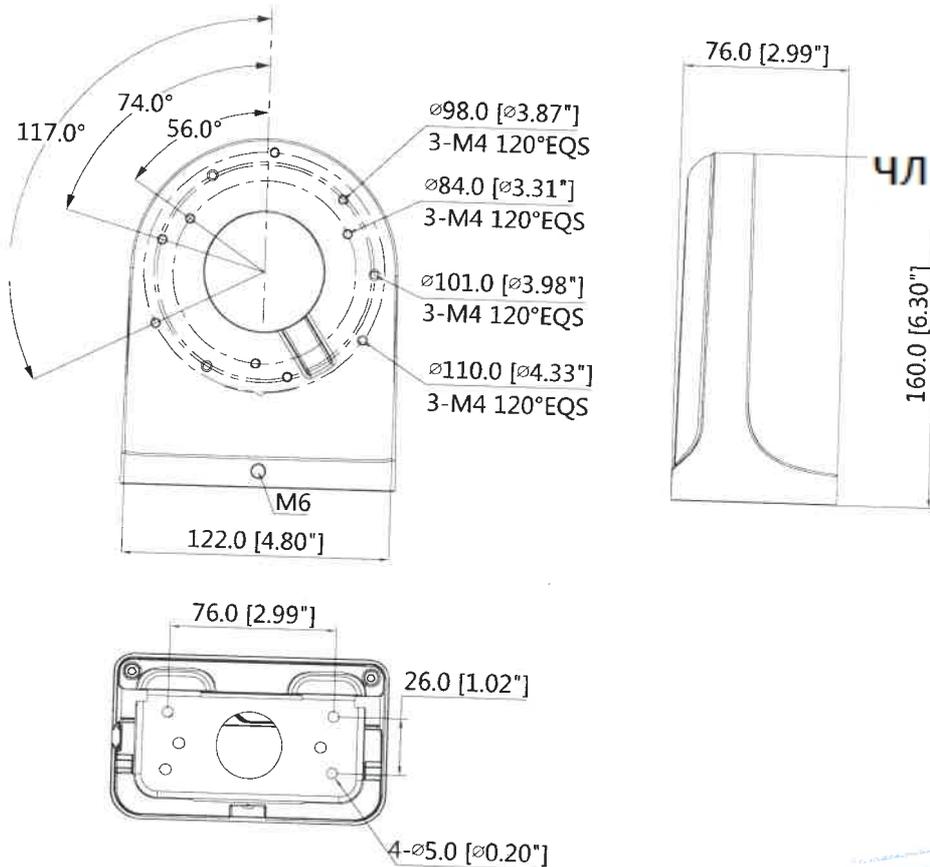

чл.2 33ЛД


СТРОГО С ОРИГИНАЛА

87761

чл.2 33ЛД

Камера Mount Series | DH-PFB20

Приложение

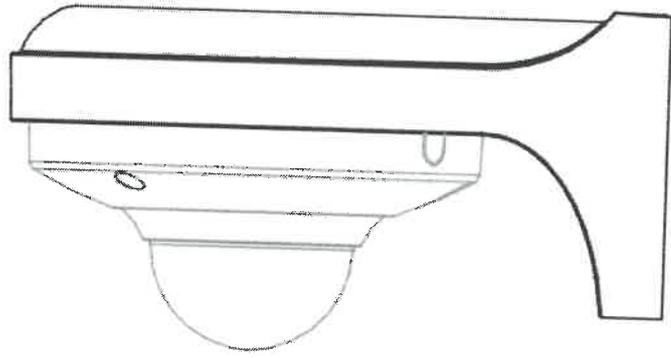

пакет Информация

- Стойка за степен монтаж * 1
- M4 винт * 3
- ST4 винт * 4
- Пластмасови котва * 4
- Бесният * 1

чл.2 33ЛД

КОПИРАНО С ОРИГИНАЛА

чл.2 33ЛД

КОПИРАНО С ОРИГИНАЛА

чл.2 33ЛД

чл.2 33ЛД